


A9-b

ETICS - Exterior wall - sloped roof

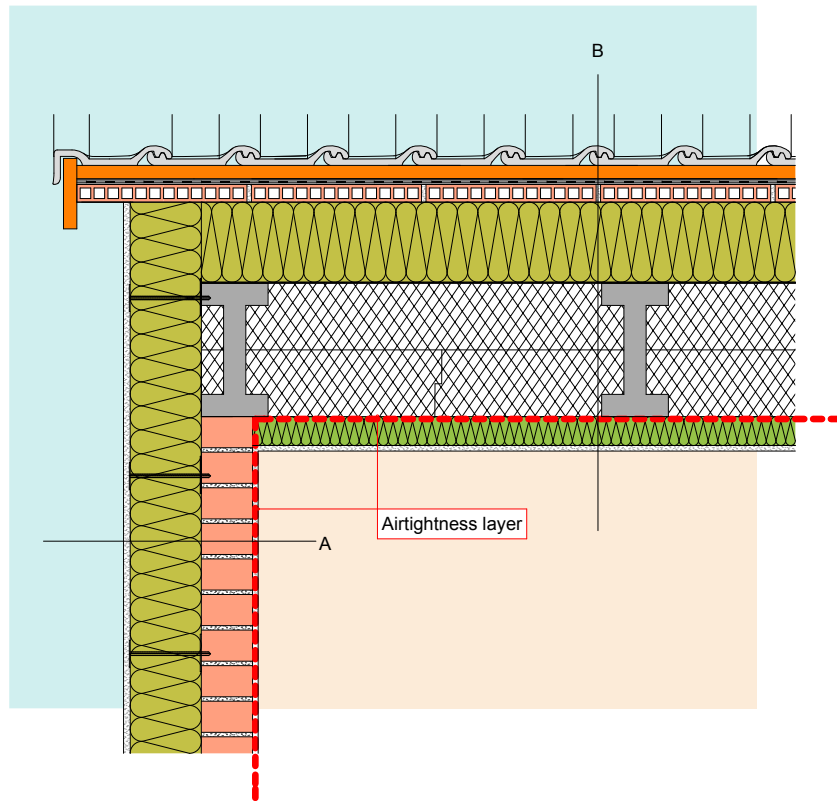

Section A in mm

- 15 Internal rendering
- 115 Ceramic perforated bricks
- 160 ISOVER insulation ISOFEK Stonewool ($\lambda=0,036$)
- 15 External rendering

Section B in mm

- Roof tiles
- Battens
- Rain screed
- 40 Ceramic perforated bricks
- 180 ISOVER mineral wool slab PANEL CUBIERTA 150 ($\lambda=0,039$) fixed with anchors
- 300 ISOVER perforated XPS between concrete rafters ($\lambda=0,045$)
- 65 ISOVER insulation ARENA PLUS ($\lambda=0,034$)
- 12,5 Plaster board