


## CLIMAVER® Self-Supporting Ducts



High-density, ISOVER rigid glass wool panel; the external facing is covered with kraft paper and glass mesh reinforced aluminium foil, which acts as a vapour barrier, and the internal facing with a black reinforced glass neto fabric with high mechanical resistance.

Given its superior thermal and acoustic insulation, **CLIMAVER® A2 APTA** is the ideal solution in order to meet the highest reaction to fire requirements when installing: • Networks of self-supporting air-distribution ducts in thermal installations within air-conditioning systems in buildings.

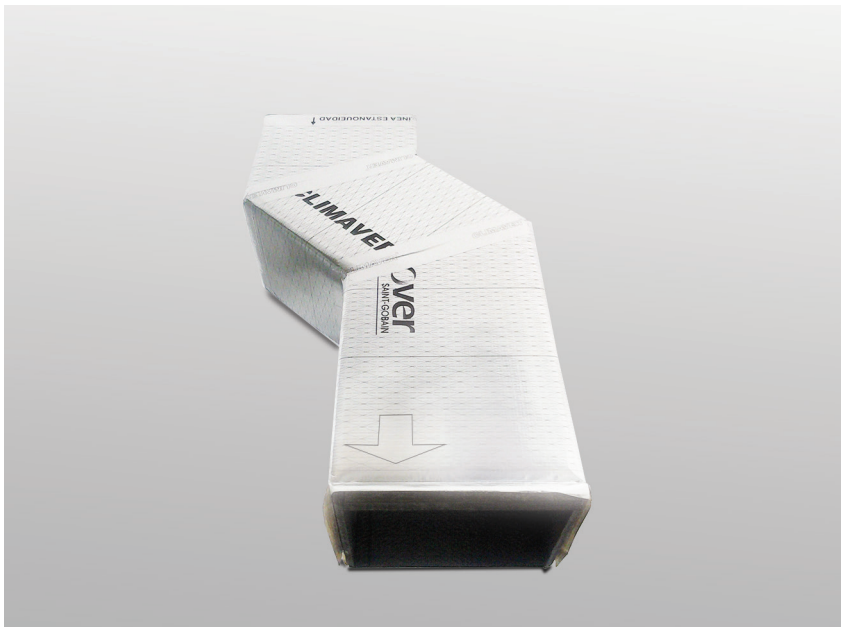

### THERMAL INSULATION

High thermal performance.



### AIRTIGHTNESS

Highest air tightness class.



### SOUND INSULATION

Optimal acoustic ambient quality.



### EASY HANDLING

Unique guiding mark lines for SDM cuts. Duct union continuity, thanks to the exclusive male/female leaning shiplaps of the panels.



### FAST INSTALLATION

Easy and fast installation. Maximum on-site efficiency.



### RECYCLED GLASS

Sustainable product. 100% recyclable. Recycled material  $\geq 50\%$ .



CHARACTERISTIC	SYMBOL	UNIT	QUANTITIES AND DECLARED VALUES				STANDARD
Thermal conductivity	T	[°C]	10	20	40	60	EN 12667 EN 12939
	$\lambda$	[W/(m·K)]	0.032	0.033	0.036	0.039	

CHARACTERISTIC	SYMBOL	UNIT	QUANTITIES AND DECLARED VALUES							THICKNESS [mm]	STANDARD
Practical acoustic absorption coefficient, $\alpha_p$	-	Hz	$\alpha_w$	125	250	500	1000	2000	4000	-	EN ISO 354 EN ISO 11654
	$\alpha_p$	-	0,90 <sup>(1)</sup>	0,40	0,70	0,85	0,90	1,00	40		
Acoustic attenuation, in a straight duct, $\Delta L$ (DB/m)*	Section, S mm <sup>2</sup>	200 x 200	-	5,82	12,75	16,73	18,12	21,00	-		
		300 x 400	-	3,40	7,43	9,76	10,57	12,25			
		400 x 700	-	2,29	5,01	6,57	7,12	8,25			

Acoustic trials with plenum: CTA 140003/REV.

<sup>(1)</sup> Weighted acoustic absorption coefficient  $\alpha_w$ , without plenum 0,70 (40mm thickness) CTA 140053/REV-2 y  $\alpha_w$  without plenum 0,90 (50mm thickness) CTA 140045/REV-2.

\* Estimated by the formula:  $\Delta L = 1.05 \cdot \alpha_p \cdot 1.4 \cdot P/S$ , (P = perimeter) for the sound power of a ventilator with a 20,000 m<sup>3</sup>/h flow, load loss 15 mm ca.

CHARACTERISTIC	SYMBOL	UNIT	QUANTITIES AND DECLARED VALUES				STANDARD
Reaction to fire	-	Euroclass	A2-s1, d0				EN 13501-1 EN 15715
Resistance to the diffusion of water steam of mineral wool, $\mu$	MV	m	1				EN 12086
Resistance to the diffusion of water steam of facing	Z	m <sup>2</sup> ·h·P	> 140				EN 12086
Thickness of the air layer equivalent to water vapor diffusion, Sd	MU	m	100				EN 12086
Airtightness	-	Class	D				UNE-EN 13403 EN 12237
Resistance to pressure	-	Pa	800				UNE-EN 13403
Dimensional stability, $\Delta\epsilon$	-	%	<1				EN 1604
Instructions for use	-	-	Consultar Manual de Montaje de conductos CLIMAVER. Información adicional disponible en: <a href="http://www.isover.es">www.isover.es</a>				-
Characteristics	-	-	Resistant to the most aggressive cleaning methods. No proliferation of mould and bacteria.				-

DELIVERY FORM: STANDARD DIMENSIONS / PACKAGING INFORMATION*						
Thickness d (mm)	Length l (m)	Width b (m)	m <sup>2</sup> /pack	m <sup>2</sup> /pallet	m <sup>2</sup> /truck	Designation code
40	3.00	1.21	18.15	199.65	1597	MW-EN 14303-T5-MV1

\* Also available in 50mm upon request.



[www.isover.es](http://www.isover.es)

This data sheet was completed on the date indicated on the right-hand side and was done with ISOVER's knowledge and experience at that time. However, it does not offer any legal guarantee, unless it has been expressly agreed. Bearing in mind that our knowledge and developments of building solutions and products are continuously evolving, ensure that when you use this data sheet, it is the latest version. The description of the product applications does not take into account the special circumstances that may arise for a specific case. Please check that this product is the appropriate one for the application you are considering. For more detailed information, contact our network of ISOVER branches.

SAINT-GOBAIN ISOVER IBÉRICA, S.L. • C/ Príncipe de Vergara, 132 • 28002 Madrid • Spain

